

Rec'd PCT/PTO 21 JAN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/011299 A2

(51) International Patent Classification⁷:

B60R

[US/US]; 5416 Lonesome Oak Court, Fort Wayne, IN 46845 (US). BYKOWSKI, Scott [US/US]; 902 South 600 West, Angola, IN 46703 (US).

(21) International Application Number:

PCT/US2003/023175

(74) Agent: NAUMAN, Timothy, E.; Fay, Sharpe, Fagan, Minnich & McKee, LLP, 7th Floor, 1100 Superior Avenue, Cleveland, OH 44114 (US).

(22) International Filing Date: 25 July 2003 (25.07.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/398,847

25 July 2002 (25.07.2002) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): COOPER TECHNOLOGY SERVICES, LLC [US/US]; 701 Lima Avenue, Findlay, OH 45840 (US).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): LEW, John, G.

[Continued on next page]

(54) Title: BREAK-AWAY CRADLE OR SUB-FRAME MOUNT AND RETAINER WASHER ASSEMBLY

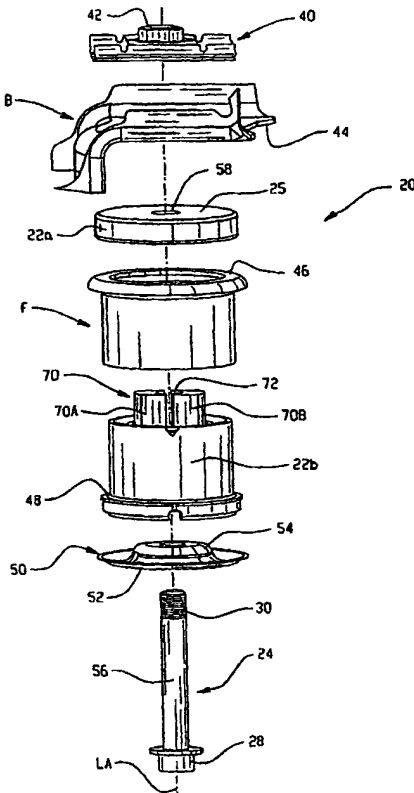

(57) Abstract: An isolator assembly such as a cradle mount or body mount assembly incorporates break-away features. An insert includes a thinned Cross-sectional region, or a gap/Interface between insert portions, that allow the holt to break-away under a predetermined load in the fore and aft directions. In addition, a retainer washer may have an irregular configuration such as a tear-drop or clover-leaf configuration that cooperates with the insert to allow the assembly to pull away in the negative z direction under a predetermined load.

WO 2004/011299 A2



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*